Phone 718-369-1100
www.asllighting.com

ASSEMBLY INSTRUCTION

Item NO.: I-ASL-510701, I-ASL-510901, I-ASL-511201, I-ASL-510702, I-ASL-510902, I-ASL-511202

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. THIS PRODUCT MUST BE WIRED IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND ALL APPLICABLE LOCAL CODES.
- TO PREVENT PERSONAL INJURY OR PRODUCT DAMAGE ONLY LICENSED ELECTRICIANS SHOULD PROVIDE ALL INSTALLATION SERVICES.
- TO AVOID ELECTRIC SHOCK OR COMPONENT DAMAGE DISCONNECT POWER BEFORE ATTEMPTING INSTALLATION OR SERVICING.
- USE CAUTION WHEN HANDLING THIS PRODUCT DURING OR AFTER OPERATION AS IT MAY BECOME HOT AND CAUSE BURNS. DISCONNECT PRODUCT AND ALLOW COOLING PRIOR TO SERVICING.
- ANY ALTERATION OR MODIFICATION OF THIS PRODUCT IS EXPRESSLY FORBIDDEN AS IT MAY CAUSE SERIOUS PERSONAL INJURY, DEATH, PROPERTY DAMAGE AND/OR PRODUCT MALFUNCTION. TO PREVENT PRODUCT MALFUNCTION AND / OR ELECTRICAL SHOCK THIS PRODUCT MUST BE PROPERLY GROUNDED.
- THIS LUMINAIRE IS DESIGNED TO OPERATE IN AMBIENT TEMPERATURES RANGING FROM -4°F TO +104°F (-20°C TO +40°C).
- THIS LUMINAIREIS SUITABLE FOR WET LOCATIONS. COVERED CEILING ONLY.
- TO PREVENT WIRING DAMAGE OR ABRASION, DO NOT EXPOSE WIRING TO EDGES OF SHEET METAL OR OTHER SHARP OBJECTS.

Safety Precautions:

IMPORTANT:
READ CAREFULLY BEFORE INSTALLING THE FIXTURE. RETAIN FOR FUTURE REFERENCE.
GENERAL:
- Upon receipt of the fixture, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier.
- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before handling it.

Trouble Shooting Checklist

•Check your power source.
•Check electrical connections


List of Parts Included

- 1x Fixture
- 3x Wiring connectors
- 2x Screws
- 1x Mounting plate

Installation Instructions


1. Make sure power is turned off and the J-Box fixed on the ceiling surface.


❷



2. Remove the mounting plate from the back of the fixture.


Phone 718-369-1100
www.asllighting.com

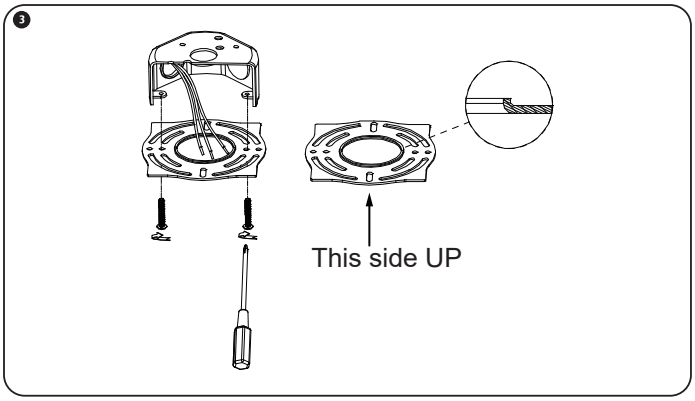


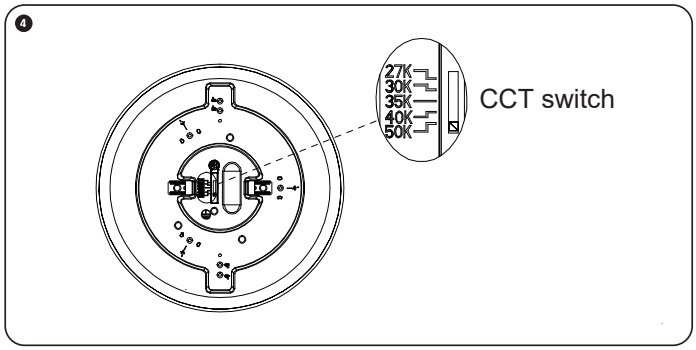

4. Select desired CCT.


3. Fasten mounting plate to J-BOX with mounting screws.

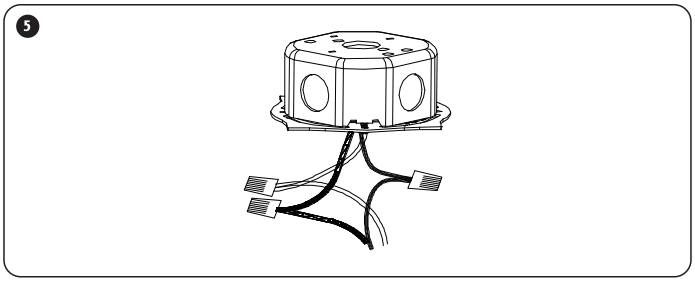


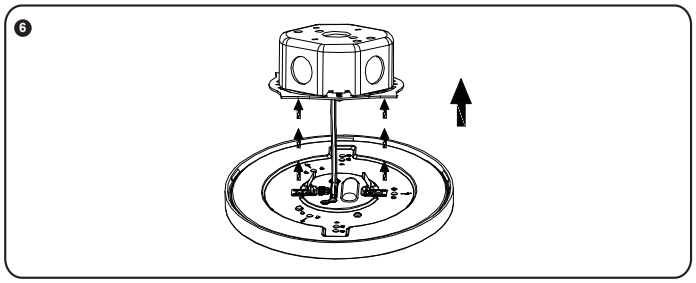

5. Wire the surface mount, white-white, black-black. Once wire connections are made, secure each with a wire nut.

6. Align spring clips on the fixture with mounting plate.

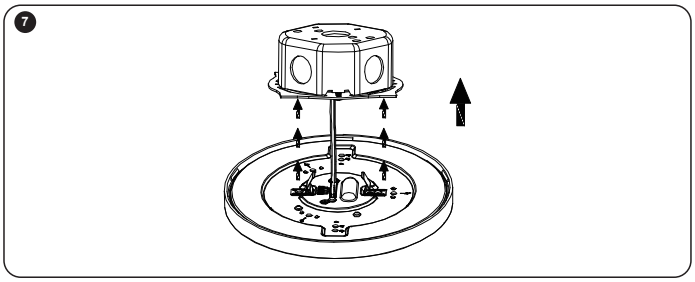

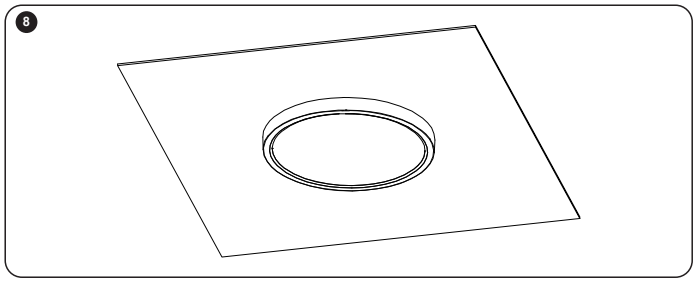

7. Carefully tuck wires into J-Box, and raise the surface mount up into place.

8. Caulk around the mounting surface edge with silicone sealant.