
SLM

Overbed

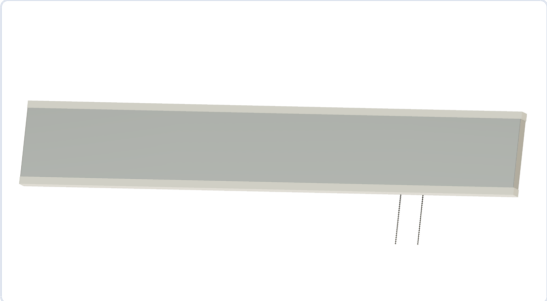

ADA Compliant

Properties

Light Source	Integrated LED
Location	Damp
Base Construction	Stainless Steel
Lens	Frosted Acrylic
Standard Finish	Black

Specs

Wattage	32/64
Voltage	120-277
Dimensions	W:32.6" H:6.75" E:2.1"
Dimming	Triac / 0-10V
CCT	3CCT - 3000K / 3500K / 4000K

Light Properties

Lumens	3,000/6,450
Light Direction	Up & Down with 4 way pull chain, and night light
CRI	80
Life Hours	50,000

Other Options

SKU	Dimensions	Wattage	Voltage	CCT	Lumens
SLM33B	W:32.6" H:6.75" E:2.1"	32/64	120-277	3CCT	3,000/6,450
SLM33S	W:32.6" H:6.75" E:2.1"	32/64	120-277	3CCT	3,000/6,450
SLM44B	W:43.7" H:6.75" E:2.1"	32/64	120-277	3CCT	3,000/6,450
SLM44S	W:43.7" H:6.75" E:2.1"	32/64	120-277	3CCT	3,000/6,450

Not seeing what you're looking for? Contact us! info@asllighting.com

© Copyright © 2026 ASL Lighting Inc. All rights reserved. • asllighting.com