MEL18

Sconce



ADA Compliant

Properties

Base Construction	Cold-rolled Steel
Lens	Acrylic
Application	Sconce
Location	Damp
CRI	80
Life Hours	50,000
Light Source	Integrated LED

Standard Selection

Voltage	120-277
Finish	Black
CCT	3000K

Finish Options

- ☐ Black
- ☐ Bronze
- ☐ Gold/Brass
- ☐ ORB
- ☐ White
- ☐ Satin Nickel

CCT Options

CCT	3000K

Options


Size	Dimensions	Wattage	Voltage	Lumens

BSB-12	W:6" H:12" E:4"	10/15	120-277 / ND (120V (non dimming)) / TD (120V Triac dimming) / DV (120V-277V (non dimming)) / DVD (120V-277V 0-10 dimming)	1300/1950
BSB-15	W:6" H:15" E:4"	15/20/25	120-277 / ND (120V (non dimming)) / TD (120V Triac dimming) / DV (120V-277V (non dimming)) / DVD (120V-277V 0-10 dimming)	1950/2600/3250
BSB-18	W:6" H:18" E:4"	20/25/30	120-277 / ND (120V (non dimming)) / TD (120V Triac dimming) / DV (120V-277V (non dimming)) / DVD (120V-277V 0-10 dimming)	2600/3250/3900
BSB-24	W:6" H:24" E:4"	20/25/30	120-277 / ND (120V (non dimming)) / TD (120V Triac dimming) / DV (120V-277V (non dimming)) / DVD (120V-277V 0-10 dimming)	2600/3250/3900
BSB-30	W:6" H:30" E:4"	20/25/30	120-277 / ND (120V (non dimming)) / TD (120V Triac dimming) / DV (120V-277V (non dimming)) / DVD (120V-277V 0-10 dimming)	2600/3250/3900
BSB-42	W:6" H:42" E:4"	30/35/40	120-277 / ND (120V (non dimming)) / TD (120V Triac dimming) / DV (120V-277V (non dimming)) / DVD (120V-277V 0-10 dimming)	3900/4550/5200

Not seeing what you're looking for?

Contact us!

info@asllighting.com

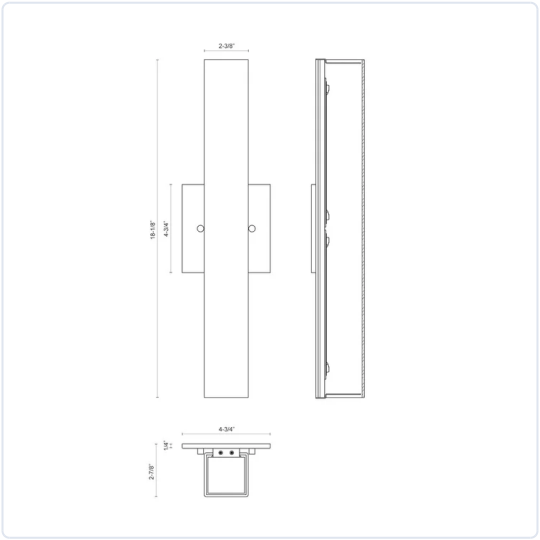

© Copyright © 2026 ASL Lighting Inc. All rights reserved. • asllighting.com