


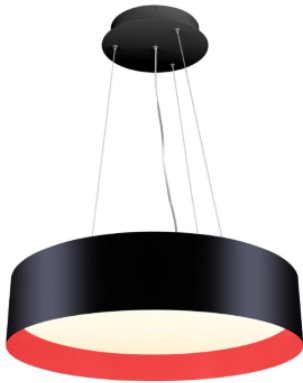

Properties

Base Construction	Aluminum
Lens	Polycarbonate
Application	Pendant
Location	Dry
CRI	80
Life Hours	50,000
Light Source	Integrated LED
Light Direction	120

Standard Selection

Voltage	120V-277V (non dimming)
Finish	Black
CCT	4000K

Finish Options

- | | |
|---|-------------------------------------|
| ☐ Black | ☐ Gold/Brass |
| ☐ Bronze | ☐ ORB |
| ☐ Brushed Nickel | ☐ White |

CCT Options

CCT	3000K/4000K/5000K
-----	-------------------

Options

Size	Dimensions	Wattage	Voltage	Lumens
C2134P-24	D:24" H:6"	40	TD (120V Triac dimming) / DV (120V-277V (non dimming)) / DVD (120V-277V 0-10 dimming)	5200
C2134P-35	D:35" H:6"	90	TD (120V Triac dimming) / DV (120V-277V (non dimming)) / DVD (120V-277V 0-10 dimming)	11700
C2134P-47	D:47" H:6"	180	TD (120V Triac dimming) / DV (120V-277V (non dimming)) / DVD (120V-277V 0-10 dimming)	23400

Not seeing what you're looking for?

Contact us!

info@asllighting.com