www.asllighting.com
Phone 718-369-1100

RDN-E-18 / RDN-E-24 / RDN-E-36

OUTDOOR WALL LIGHT

WARNING

1.Always turn off the power suppy before installation.
2.This product must be installed in accordance with applicable installation code by a qualified electrician who is familiar with the construction and operation of the product and the hazards involved.
3.Do not install the fixture on unstable, loose or friable surfaces.

Preparation:
Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
If any parts are missing or damaged, DO NOT attempt to assemble the product.

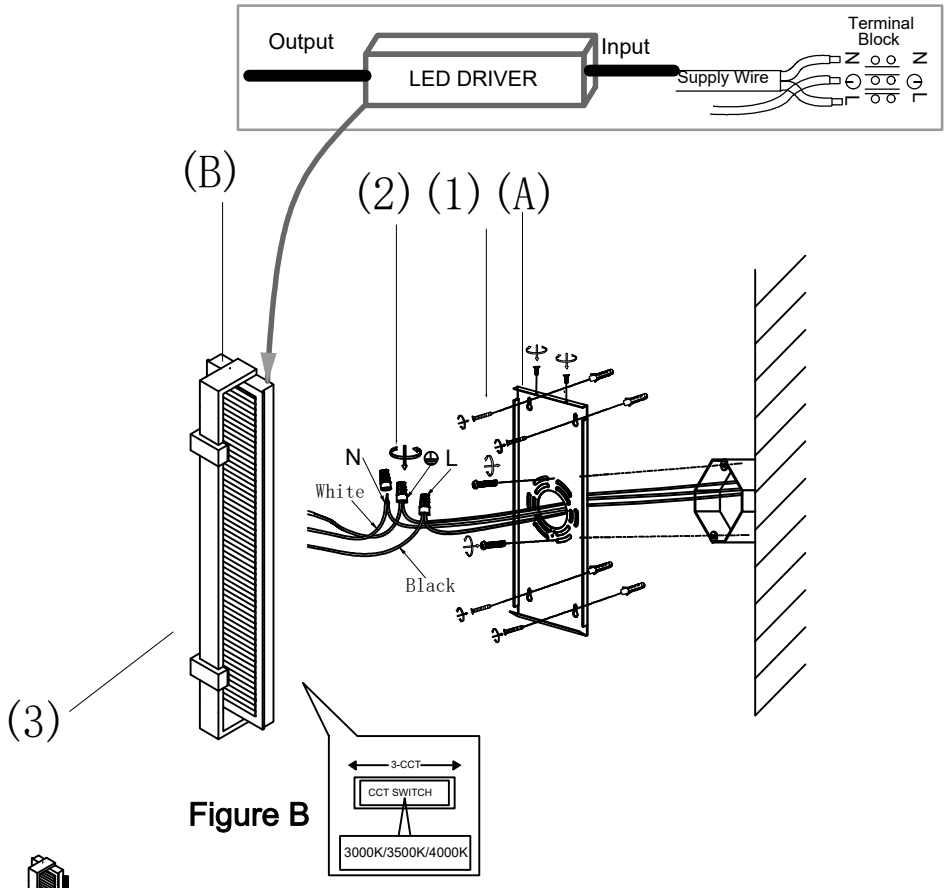


Figure B




Figure D




Figure A




Figure C

Assembly Instructions:

1. Please turn off the power before installing the lamp [see figure A]
2. Remove the mounting bracket from the fixture, mount the bracket onto the junction box.Next tighten with the junction box screw.
3. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts provided in hardware package.
4. Choose color temperature by adjusting the switch on the back of fixture[see figure B]
5. Secure the canopy to the mounting plate using the mounting screws.
6. Turn on the power [see figure C]
7. Apply caulk around the backplate where it meets the wall.Leave an opening at the bottom for water drainage. [see figure D]