www.asllighting.com
Phone 718-369 -1100

Surface Mount LED Panel Light

INSTRUCTION MANUAL

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.
! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician


Product Model	Power	Working Current	Input Voltage	Luminous Efficacy	CCT	Viewing Angle	Ra	Dimmable	Warranty
ASL-1001	30W/35W/40W/45W/50W	0.458A	AC120-277V	130lm/W	3500K / 4000K / 5000K / 5700K / 6500K	120°	≥80	0-10V	5 years
ASL-1002	20W/25W/30W/35W/40W	0.367A							

Warning


* LED Panels are not suitable for using in wet loations
* Please keep the LED Panel away from any corrosive substance, and please use dry cloth when you clean it
* LED Panel can only be installed by a qualified electrician.
* Before installation or maintenance, please disconnect the power to prevent electric shock.

Installation Instructions for Surface-mounted Backlit Panel


1. Turned off the power before installation.

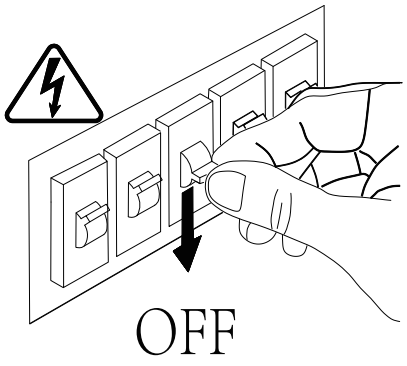


2. Use the surface-mounted bracket to mark the hole positions and dimensions on the ceiling around junction box.

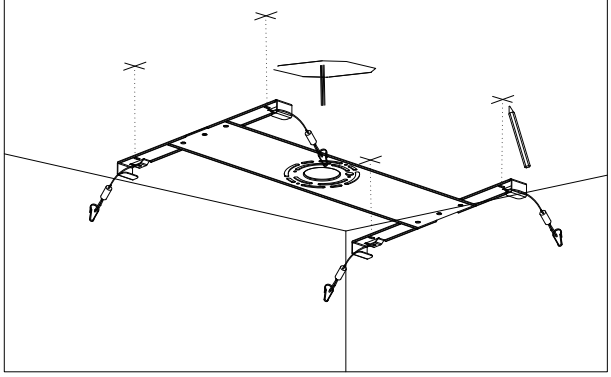


3. Drill holes at the marked positions with an electric drill

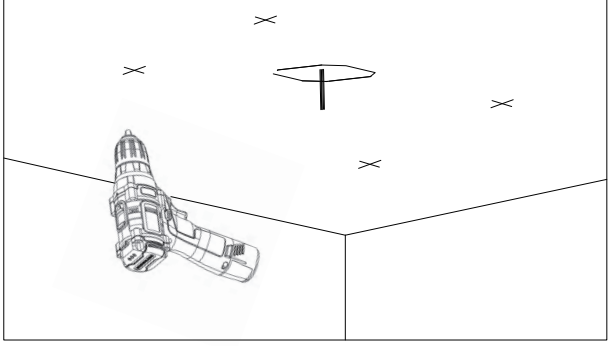


4. Use the anchors and screws to fix thesurface-mounted bracket to the ceiling.

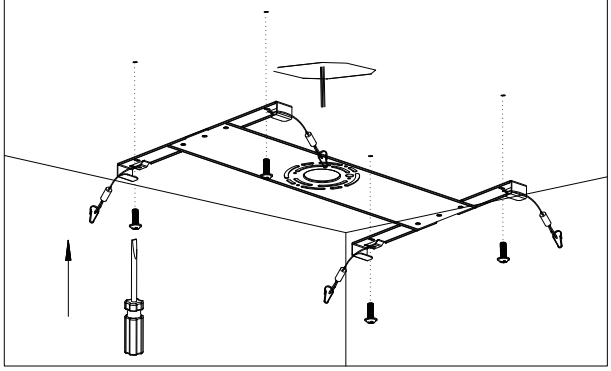


5. Combine the wire buckles on both sides to achieve dual safety.

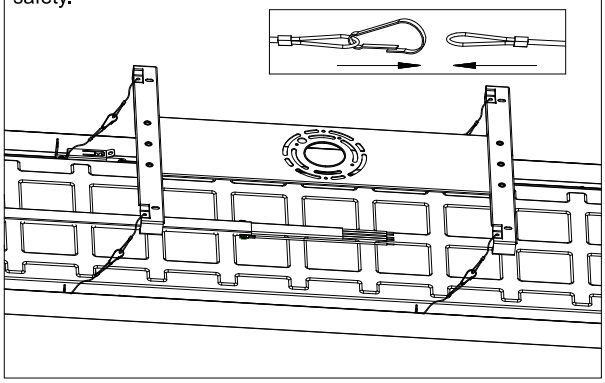


6.Connect other wires separately.

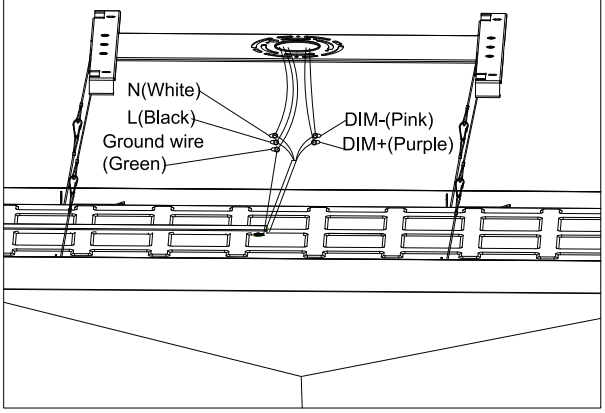


7. Raise the fixture and align it with the surface-mounted bracket.

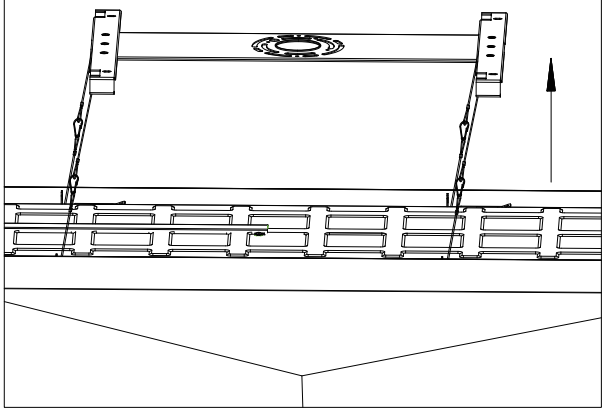


8. Push the fixture and secure the slots on the back of the fixture into the surface-mounted bracket.

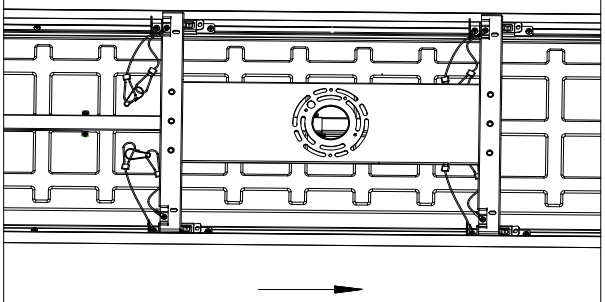


9. The diagram of the correct engagement of surface-mounted bracket slots as below figure.

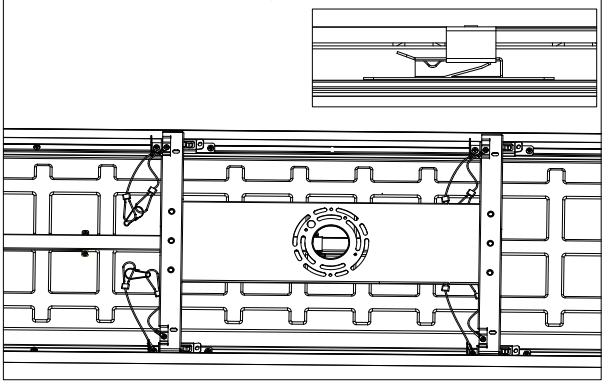

10. The diagram of fully installed fixture as below figure.

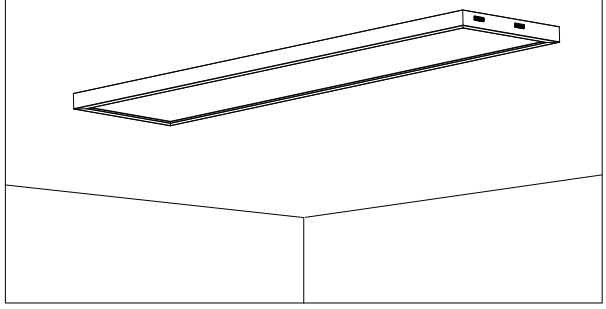

11. Turn on the power and test the fixture.

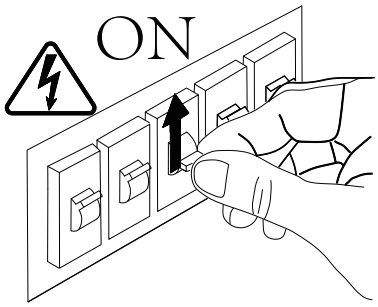

12. select desired power and CCT by DIP switches.

